


PM Circulator Both Axis Working (PM CIRB) (1310/1550/1585nm)

1. Features:

- Low insertion loss
- High Extinction
- High Return Loss
- Excellent environmental stability and reliability

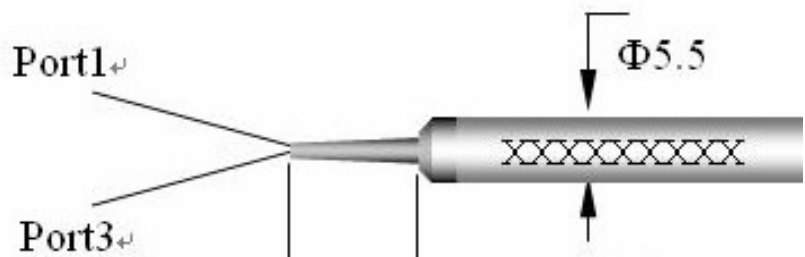

2. Applications:

- Optical Amplifier
- Fiber Transceiver
- Communication System
- Test Instrumentations
- Optical Fiber Bragg Grating(FBG)



3. Compliance:

- Telcordia GR-1209-CORE
- Telcordia GR-1221-CORE
- RoHS

深圳市深建通信科技有限公司

4. Specifications:

Parameter	Type	Unit	1X2		2X2	
			P	A	P	A
Grade		/	P	A	P	A
Working Wavelength		nm	1310±30 or 1550±30 or 1585±30			
Typ. Insertion Loss		dB	0.6	0.8	0.8	1.0
Insertion Loss		dB	≤1.0	≤1.2	≤1.2	≤1.3
Peak Isolation		dB	50			
Isolation		dB	≥40			
Extinction Ratio		dB	≥18			
Working Axis Type		/	Both Axis Working			
Return Loss		dB	≥50			
Cross Talk		dB	≥50			
Power Handling		mW	≤500			
Tensile Load		N	≤5			
Fiber Type		/	PM1550 fiber			
Optical Path		/	Port1→Port2→Port3			
Operating Temperature		°C	-5 to +70			
Storage Temperature		°C	-40 to +85			

*The specifications are w/o connector.

* For devices with connectors, 0.3dB higher for IL, 5dB lower for RL and 2dB lower for ER.

* For device with connector, key aligned to slow axis.

5. Product Ordering information:

PM CIR		X	X X	X	X	XXX	XX	XX
Product Description	Port Type	Grade	Operating Wavelength	Pigtail Type	Fiber Type	Port1&2&3 Connector Type	Package Size	Fiber Length
PM CIRB	1X2	P	06=1064nm	0=250um	0=smf-28e	0=None	50=5.5×60	05=0.5m
	2X2	A	13=1310nm	1=900um	1=PM98	1=FC/UFC	90=90×20×10	08=0.8m
			15=1550nm	2=2mm	2=PM15	2=FC/APC		10=1.0m
			85=1585nm		3=PM13	3=SC/UPC		12=1.2m
					4=others	4=SC/APC		

E-mail: sales@shenjiantx.com

Web : <http://www.shenjiantx.com>